

01-08-02

JC14 Rec'd PCT/PTO 07 JAN 2002 PCT

11/07/01  
1002 U.S. PTO

40030659 040700

FORM PTO-1390 (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>CHATA-100A</b>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>10/030659</b>	
INTERNATIONAL APPLICATION NO. <b>PCT/US00/12229</b>		INTERNATIONAL FILING DATE <b>06 May 2000</b>		PRIORITY DATE CLAIMED <b>08 May 1999</b>	
TITLE OF INVENTION <b>Apparatus for Automatic Preparation of a Mixture and Method</b>					
APPLICANT(S) FOR DO/EO/US: <b>NEAS, Edwin D., TEMPLAR, Dennis L., TIFFANY, Harry J. III</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>    a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>    b. <input type="checkbox"/> has been communicated by the International Bureau.</p> <p>    c. <input checked="" type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>    a. <input type="checkbox"/> is attached hereto.</p> <p>    b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>    a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>    b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>    c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>    d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p><b>Items 11 to 20 below concern document(s) or information included:</b></p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input type="checkbox"/> A <b>FIRST</b> preliminary amendment.</p> <p>14. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input checked="" type="checkbox"/> Other items or information:     return receipt postcard</p>					

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

10/030659

INTERNATIONAL APPLICATION NO  
PCT/US00/12229ATTORNEY'S DOCKET NUMBER  
CHATA-100A21. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO. . . . . \$1040.00International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO . . . . . \$890.00International preliminary examination fee (37 CFR 1.482) not paid to USPTO  
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . . \$740.00International preliminary examination fee (37 CFR 1.482) paid to USPTO  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) . . . . . \$710.00International preliminary examination fee (37 CFR 1.482) paid to USPTO  
and all claims satisfied provisions of PCT Article 33(1)-(4) . . . . . \$100.00**ENTER APPROPRIATE BASIC FEE AMOUNT =****CALCULATIONS PTO USE ONLY**

\$ 740.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	21 - 20 =	1	x \$18.00	\$ 18.00
Independent claims	3 - 3 =	0	x \$84.00	\$ 0.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$ 0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$ 758.00

☒ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above  
are reduced by 1/2. +

\$ 379.00

**SUBTOTAL =**

\$ 379.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0.00

**TOTAL NATIONAL FEE =**

\$ 379.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 40.00

**TOTAL FEES ENCLOSED =**

\$ 419.00

Amount to be  
refunded:

\$

charged:

\$

- a. ☒ A check in the amount of \$ 419.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 02-0725. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card  
information should not be included on this form. Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR  
1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Jean M. Macheledt  
Macheledt Bales LLP  
501 Skysail Lane  
Fort Collins, CO 80525-3133  
tel: 970-218-6798

Express Mail number: ET418617179US  
Date of deposit: 07 November 2001I hereby certify that this paper or fee is being deposited with  
the United States Postal Service "Express Mail Post Office  
to Addressee" service under 37 C.F.R. 1.10 on the date  
indicated above and is addressed to the Commissioner for  
Patents, Washington, D.C. 20231.

Printed Name: Angie Asmussen

SIGNATURE

Jean M. Macheledt

NAME

33,956

REGISTRATION NUMBER

Customer No. 28304

## Apparatus for Automatic Preparation of a Mixture and Method

Background of the Invention

In general, the present invention relates to the preparation of mixtures including liquid reagents, cleaning and other special-purpose solutions, solvents, pesticides, herbicides, paints, mixed beverages, fluent foodstuff, as well as other fluent substances used in the laboratory, manufacturing plant floor, field crops, gardens, eating establishments, building structures, art lab, and so on. Common to the preparation of such a wide range of types of mixtures are the tasks of selecting, dosing, and mixing the necessary constituent fluent components into a receptacle. More particularly, the invention relates to the automation of such mixture preparation using a novel apparatus, whether the constituent components are uniformly distributed within the mixture. This apparatus and associated method utilizes a unique automated technique to, in accordance with input concerning a desired end-product, select at least one of a plurality of available fluent constituent components staged on a support structure, dose/measure a requisite amount of each selected constituent component, collect the dosed amount with mixing receptacle, and agitate/stir the collected contents in the receptacle to prepare the preselected end-product. A processor and storage device are readily adapted to collect and store data concerning the preparation, as desired. The footprint of the apparatus can be chosen for portability. And although a variety of vessels containing constituent components can be made of rigid or brittle materials, a support structure of the apparatus is adaptable for the arrangement of gravity fed, 'bag-like' flexible walled vessels.

There are many reagents/buffers, special-purpose solutions, solvents, paints, pesticides, herbicides, the list goes on, for commercial and personal use, used in research laboratories in small quantities. Very often, lab and QA (quality assurance) technicians, line employees, *etc.*, need only a single batch that includes one or more 'flasks-full', for example, of a mixture tailored for a particular study/analysis/test or other use. Every time a new reagent, solvent, solution, or other mixture is needed, the laborious process of preparing begins, over again: The appropriate formula is pulled from laboratory files (or, if none, one must be calculated), bottles of the necessary ingredients are located and removed from storage, and ingredients are measured using equipment which has to, first, be cleaned and decontaminated from any prior use. Further, the process of mixing beverages such as is done at a wedding party, alumni gathering, or other function likewise requires small 'flasks' of different beverages requiring preparation in various batch-quantities. This is also true of the production process to prepare foodstuff in small amounts.

Traditionally, mixtures that are used in smaller quantities in production lines, commercial laboratories as well as private and government research laboratories, are prepared manually on an as-needed basis. First, a trained lab technician carefully measures out the requisite amount of each raw material-ingredient from the glass container(s) in which it was shipped to the lab and is currently being stored. Many reagents, solutions, and solvents are prepared using ingredients that are quite caustic and toxic. The quantities of ingredients measured for use, are mixed in an appropriately-sized beaker or flask. The highly labor intensive process of preparing solutions used in commercial manufacturing and research laboratories not only creates opportunity for human error and serious injury, but is also very costly.

Therefore, a versatile automatic, less labor-intensive and less error-prone process is needed. Preferably such a process is carried out using a computerized apparatus designed to be generally portable, with a footprint that can accommodate the limited available counter top space found in most laboratories, manufacturing environments, and eating establishments. The innovative apparatus and method described herein utilize a unique sophisticated technique to automatically: (a) access, dispense, and dose appropriate quantities of selected ingredients held in containment vessels in proximity to one another, this being done according to input entered through some type of user interface as well as a plurality of instructions/commands stored for automatic retrieval into computer memory, and (b) collect each such ingredient into a receptacle (such as a flask, beaker, etc.) for mixing and auto-titration (as desired). Although this new apparatus incorporates sophisticated automation techniques, its features allow for ready access to finished mixture-product. The unique automatic access to fluent ingredients, as well as dispensing and dosing techniques, can be employed by an apparatus with a footprint considered large (floor-model) or small (counter-top) to prepare a wide variety of mixtures.

Unlike the labor-intensive processes currently available, the new apparatus and associated method require much less intervention by a lab technician, line worker, etc. and provides sufficient production quality control over batch sizes of hundreds of flasks of prepared mixtures. As can be appreciated, within the spirit and scope of the design goals contemplated hereby, and as further described herein, many different types of suitable alternative structures for carrying out specified function(s) may be incorporated into the new apparatus and method of the invention. Further, the incorporation of flexible-walled vessels ('bag-type') having novel features invented by certain of the listed applicant-inventors hereof, and assigned to the assignee hereof, helps address problems associated with cumbersome transport and storage of heavy, breakable ceramic (e.g., glass) hard-walled containers. These unique flexible-walled vessels can be fabricated from many suitable materials into many different shapes and sizes, and filled with countless different types of fluent substance ingredients as needed for preparing desired mixtures.

### Summary of the Invention

It is a primary object of this invention to provide an apparatus and associated method of preparing a mixture using a computerized apparatus having a plurality of vessels, each of which is arranged on a support structure and oriented for dispensing a fluent substance through at least one exit port and a first flow channel. The first flow channel of each vessel is in further communication with a dedicated measurement assembly, for dosing fluent substance so dispensed, and a second flow channel. The apparatus also includes a receptacle support; and can further incorporate a user interface for receiving a first input concerning the mixture plus a storage device to hold instructions for locating a respective one of the second flow channels and the receptacle support in operative relation (for collecting the fluent substance in a mixture receptacle placed on the receptacle support). The apparatus can further comprise titration and mixing modules; and an alternative apparatus and method can utilize a support structure having a framework moveably coupled to a sustaining member, whereby many flexible-walled vessels can be accommodated.

Several advantages of providing the novel apparatus and associated method, follow:

(a) Versatility- The invention can be used for automatic preparation of single-flask batches of different mixtures, or repeated preparation of a large quantity (multiple flasks of one mixture).

(b) Structural design flexibility- An apparatus of the invention can stage a multitude of constituent fluent ingredients (including solvents, buffers/reagents, homogeneous and non-homogeneous solutions, titrants, including reactants, etc.) for access and dispensing depending on the instructions/commands and input received for the preparation of the preselected mixture. The apparatus can be driven by its own power source (especially important for the field), or connected to an external source of power such as line voltage from an electrical wall outlet.

(c) Simplicity of use - Different batch-quantities of any one such mixture can readily be prepared with a touch of a keypad button or touch-sensitive screen, a voice command or joystick/mouse, etc. The new apparatus can be sized for portability and installed and relocated with ease and without disruption of surrounding environment. A user has at her fingertips, a panoply of programming instructions/commands for preparing hundreds of thousands of different mixtures as well as the flexibility to create new ones; and maintenance/calibration can be automated.

(d) Design flexibility- The apparatus can be sized to accommodate any number of ingredient vessels arranged and one or more of the vessels can be fed externally if usage of its contents is great throughout a day, for example. Also, many suitable mechanisms exist (and are handily adapted or redesigned) to carry out the following: receive user input, measure/dose fluent substances dispensed from a vessel, agitate/mix the substances, and titrate substances collected.

(e) Process speed and reliability/repeatability-- Reducing the need for trained technicians to carry out each of the meticulous steps required to prepare the mixture(s), allows the process of preparing to occur at a faster rate, while being less prone to error (repeatability increases).

This makes it possible to more-economically prepare a variety of preselected mixtures (regardless of batch quantities and/or product mix/variety requirements throughout a given day).

(f) Compact/efficient design- To optimize production, several apparatuses (built with a smaller footprint) can be positioned at different locations within a production or lab environment and operated simultaneously, or sequentially, to create different, or the same, mixtures. The use of flexible-walled bag type vessels, makes possible, on-the-fly replacement thereof.

(g) End-product preparation tracking- The automated features of the apparatus and method make tracking of batches, for quality assurance or other purposes such as replenishing stock of fluent substances consumed, straight-forward to integrate and implement into existing production, eating establishment, and lab environments (especially where highly regulated/monitored).

Briefly described, once again, the invention includes an apparatus for automatic preparation of a preselected mixture, comprising: a plurality of vessels, each vessel arranged on a support structure and oriented for dispensing a fluent substance through at least one exit port and a first flow channel. Each of the first flow channels is in further communication with a dedicated measurement assembly and a second flow channel. The apparatus also has a receptacle support, a user interface for receiving a first input concerning the mixture, and a storage device holding a plurality of instructions for locating a respective one of the second flow channels and the receptacle support in operative relation for collecting the fluent substance. The mixtures which can be prepared utilizing the invention include liquid reagents, cleaning and other special-purpose solutions, solvents, pesticides, herbicides, paints, mixed beverages, fluent foodstuff, as well as other fluent substances used in the laboratory, manufacturing plant floor, field crops, gardens, eating establishments, building structures, art lab, and so on.

There are additional features that *further* distinguish this invention from known devices and methods: (a) the support structure comprises a framework moveably coupled to a sustaining member; (b) a dose actuator stationed in positional relationship with the receptacle support; (c) the vessels having been hermetically formed of flexible stock material into a 'bag-type' shape; (d) mixing and titration modules; and (e) further instructions on the storage device can include: instructions for dispensing from the first flow channel the requisite amount of fluent substance from a respective vessel; instructions for directing a respective one of the dedicated measurement devices to dose the fluent substance so dispensed; instructions for rotating, or otherwise moving/sliding/positioning/placing, a respective one of the vessels and/or an associated dedicated measurement assembly and/or the receptacle support, to position a respective second flow channel above the receptacle support; instructions for automatically mixing and/or titrating, including any type of analysis/reaction performed on or to, substances collected in a mixture receptacle; and instructions for repeating the process according to input about batch size/quantities.

The invention also includes a method of preparing a preselected mixture using a computerized apparatus, including the steps of (a) receiving a first input concerning the mixture; and (b) according to the first input and a plurality of instructions held on a storage device of the apparatus: automatically locating a second flow channel and a receptacle support in operative  
5 relation; dispensing a fluent substance through at least one exit port and a first flow channel from a respective one of a plurality of vessels arranged on a support structure of the apparatus, each of the first flow channels in further communication with a dedicated measurement assembly and a second flow channel; and using the measurement assembly, dosing the fluent substance so dispensed. The additional features listed above, *further* distinguish the method of the invention.

#### Brief Description of the Drawings

For purposes of illustrating the flexibility of design and versatility of the innovative preferred apparatus and method, the invention will be more particularly described by referencing the accompanying drawings of embodiments of the invention (in which like numerals designate like parts). The figures have been included to communicate the features of the invention by way  
10 of example, only, and are *in no way* intended to unduly limit the disclosure hereof.

FIG. 1 diagrammatically illustrates features of a preferred apparatus 10 of the invention.

FIG. 2 is an isometric of a preferred apparatus 30 detailing further structural features.

FIG. 3 is an isometric of an alternative apparatus labeled 50, with shroud 41 removed and certain other features slightly altered.

FIG. 4 is a side view of the alternative apparatus 50 in FIG. 3.

FIG. 5A is a schematic side view representation of the apparatus 50 illustrating many of the features shown in FIG. 4, in further detail.

FIG. 5B is a schematic top view of an alternative apparatus 100 to show representative locations of certain of the features.

FIG. 6 is an isometric illustrating a preferred flexible-walled vessel 130 of the invention in use alongside laboratory-type equipment supported by an alternative framework.

FIGs. 7A, 7B, and 7C are schematic representation (two side views and a top view, respectively) of an alternative apparatus 250, again detailing certain features of the invention.

FIG. 8 is a flow diagram detailing preferred steps, in an expanded novel manner, of a method 300 of preparing a preselected mixture using a unique apparatus of the invention.

#### Detailed Description of the Preferred Embodiments

As identified above, the apparatus of the invention 10 is shown with several appropriately sized vessels labeled 14a - 14f in fluent communication 18a- 18f with a spout or collection channel 19 and into a receptacle 20. At some point prior to operating the apparatus, each vessel is filled

with the fluent substance ingredient and arranged for dispensing along a respective channel 18a-18f according to amount of use throughout the period of operation. Vessels can be made of made of any sturdy flexible-walled or other material (*e.g.*, a glass or other ceramic, a polymer, a metal alloy, and so on) that is compatible with the substance contained therein. Certain of the substances may be used so often during mixture preparation operations that it is beneficial to communicate with an external source. For example, the vessel 14d containing water is shown with conduit 15 and a valve, not shown, connected to an external source (such as, filtered/treated tap water) 21 to allow for uninterrupted resupply of vessel 14d throughout operations.

Operation of the vessel is represented at 17a as a processor in electrical communication with some type of storage device 25 (any peripheral unit or device, whether housed internally or externally hardwired or wireless, that holds data such as magnetic tape, magnetic disk optical disk, diskettes, flash cards, magnetic drums, and so on), a user interface 16 (such as a touch-sensitive screen or display 16a, keyboard/keypad 16b, light pen 16c, joysticks and trackballs 16d, mouse 16e, printer/OCR-scanner 16f, audio signal receiver/microphone 16g along with voice-recognition circuitry to digitize spoken words and enters them into the computer, and so on) for receiving input concerning the mixture selected, batch number, whether titration/reaction steps are to be performed, etc., and some type of wide area network (WAN) 24 that can be employed if input data is to be received or transmitted remotely such as through the global information network known as the INTERNET network. The user input can be any type suitable for the environment in which the apparatus will operate. For example, the apparatus may have to operate within a high humidity chamber or it may be used by gloved technicians with caustic materials on the outside of the gloves. In that case, it is preferably to chose a hermetically-sealed interface that is easy to activate (touch screen or voice-activated, for example). The user interface may also be one that is remote to the apparatus, such as outside the humidity chamber or offsite in a material storage warehouse. In this case, the user interface may be interconnected to computerized control system 17a via WAN 24. At 17b is a box representing the automated dispensing and dosing function(s) of the apparatus.

The apparatus and method of the invention are preferably carried out by incorporating a processing unit linked by a communication network, or bus, to both a user interface 16 (which can be something as simple a coded activation 'keys' pre-programmed for a preselected mixture preparation 'recipe') and internal memory that can call-up instructions stored on a storage device comprising the detailed sequence of instructions to direct the apparatus to perform the preparation steps. By way of background, central processing unit (CPU) chips and microprocessors have four functional sections: (1) the arithmetic/logic unit, (2) temporary storage locations, called registers, which hold data, instructions, or the results of calculations; (3) the control section; and (4) the



internal bus, a network of communication lines that links internal CPU elements and offers several different data paths for input from and output to other elements of the computer system. Computer, and computerized, refers to *any* general-purpose apparatus that processes data according to a set of instructions stored internally either temporarily or permanently. Data is stored both memory and on more-permanent storage units/devices. The semi-permanent or permanent holding place for data is generally called "storage" and memory is the more-temporary workspace for executing instructions and processing data. A set of instructions that perform a particular task is generally referred to as a program or software program.

FIG. 2 diagrammatically illustrates additional design features that *further* distinguish the apparatus 50 and method 300 of the invention from known processes and systems. Here, a housing or shroud 41, built of suitable structurally-sound material, covers several components of the apparatus as will be explained further. Each vessel (here, labeled 34a - 34f) has been oriented on a centrally-located sustaining member 48 of a support structure (not labeled for simplicity) for the purpose of unobstructed dispensing its contents into internal measuring equipment (as can be seen in FIGs. 3-5A and 5B with shroud 41 removed) for dosing and further final flow into the receptacle (such as the flask 40 positioned on receptacle support 43). In communication with the processor employed to carry out the instructions/commands for preparation of a mixture is user interface panel 36 having buttons/keys 37, an LED alphanumeric display 39, and LED indication lights 38 to communicate preparation status. As mentioned, any suitable user-input interface may be employed, including one remotely located. Base 45 is on rollers 47a-47c and has a handle 35 for portability. Receptacle support 43 is stationed on base 45 and shelving 46 has been added.

In FIG. 3, one can see how spokes 49a-49f of framework 48A may be rotatively coupled to axis member 48B which is, in turn, affixed to base 55. End-projections (59a, 59c in FIG. 4) of spokes 49a-49f extend through support openings 54a, 54b of the upper ends of bag-type flexible-walled vessels 34a - 34f) as well as dedicated measurement assemblies 64a - 64f can readily be seen. Extending below each assembly 64a - 64f is a piston rod (respectively 68a - 68f) and extending from each assembly 64a - 64f is a flow channel (respectively 66a - 66f)- all of which will be further explained. Stationed in positional relationship with receptacle support 53 on base 55 is a dose actuator mechanism 80.

As can better be appreciated in FIG. 4, each vessel 34a - 34g has a port (such as those labeled 72a, 72c) and a first flow channel (such as those labeled 74a, 74c) leading to a respective valve (preferably directional/check valves) labeled 76a-76f and in communication with a respective measurement assembly 64a - 64f and second flow channels 66a-66g which each include a hinged connector 78a-78g for design flexibility. One can see how receptacle support 53 has

been located under assembly 64c for collecting fluent substance flowing from flow channel 66c into receptacle 40. Dose actuator mechanism 80 has extensions 84A, 84B to station it to base 55 via sustaining (axis) member 48B. In operation as designed (but certainly not limited to this particular structure) dose actuator 80 operates as follows (please see also FIG. 5A): A push-surface 85 is activated to push against a bottom end of a respective piston rod (such as that at 68a, 68c, 68f) in an upwardly direction to push a head (such as those labeled 67a, 67c in FIG. 5A) correspondingly upward to force the fluent substance dispensed into a respective piston cylinder volume (as labeled 64a, 64c in FIG. 5A), having passed through upstream valves 76a-76f. The novel dosing actuator 80 illustrated provides excellent dosing accuracy.

Certain features can be better appreciated in FIG. 5A. Dose actuator 80 can have a motor 81 or other mechanism coupled to threaded dowel 82 to translate electrical power into mechanical drive power to activate push-surface 85. The actuator will be automatically controlled to size cylinder volume 64a, 64c as needed according to requisite dosage of fluent substance from a respective vessel. Projections 59c may be hook-shaped to anchor respective vessels 34a - 34g

Corresponding structure in alternative apparatus 100 of FIG. 5B includes: circuitously arranged vessels 134a-134g on framework (including spoke 149g) coupled to axis member 148B, measurement assemblies 164a-164g circuitously arranged on the framework (supporting spokes for the assemblies 164a-164g are not in view, here, but can be seen in FIG. 3 and labeled 78A), and receptacle 40 on receptacle support 93 is shown in operative relation with second flow channel hinge 178g and vessel 134g.

The flexible-walled vessel 130 of FIG. 6 has an upper-end 137 through which an opening 138 passes. A lower-end 139 has an exit port 136 and a flow channel 144B having tubular outer wall 144D, is in further communication with connector 144C and a pinch-type valve 144A. An additional port 132A (such as for filling the vessel) has been permanently closed at 132B.

The apparatus 250 of FIGs. 7A-7C views, have structure corresponding to that in FIGs. 2, 3, 4, 5A-5B as can be readily appreciated, including a titration probe 213 (for automatic titration, represented at box 320 in FIG. 8, of the mixture to balance its pH, or to perform some other special operation/reaction to meet a desired substance parameter) and mixer assembly 290 (having a suitable agitator device, such as a stir-rod or magnetic stir-dowel, may be lowered to mix collected substances together). Likewise, one can better appreciate the novel features of the method 300 of the invention as illustrated by way of a flow diagram in FIG. 8. Without further additional commentary provided here, one can readily appreciate the features of the invention from specific written detail added to FIG. 8 for convenient viewing, of the steps illustrated.

5      Fluent substances, as that term is used herein, includes the multitude of substances considered flowable, or capable of flowing already identified such as reagents, cleaning solutions, water (with many uses, including use as an inorganic solvent), organics, pesticides, and other substances used in a production/test type environment. 'Reagent', as defined, is any chemical  
10      compound used in laboratory analyses to detect and identify specific constituents of the material being examined. Though reagents may be gases, liquids, or solids, they are usually prepared as solutions (in water or common solvents) of various concentrations, *e.g.*, 1 molar, 0.1 normal, etc. Several thousand chemicals of varying specificity are used as reagents; they are subject to strict specifications, especially as regards purity. A non-exhaustive list of reagents includes, without  
15      limitation: glacial acetic acid; sulfuric acid; hydrogen sulfide; dimethylglyoxime; potassium iodide; 0.05 M Potassium Phosphate, pH 7.5; Sodium Acetate Buffer Solution, pH 5.0; .5% SLS in 0.1 M Phosphate Buffer (pH 8.0); 0.05 M Potassium Phosphate, pH 6.8; .025 M Phosphate pH 3.2, has Phosphoric and Acetic Acid; .05 M Sodium Phosphate pH 6.8; 0.2% diethylamine in 0.2 M Potassium Phosphate. Generally, 'solvent' is a term that designates a liquid which can reduce certain solids or liquids to molecular or ionic form by relaxing the intermolecular forces that unite them. There are tens-of-thousands of solvents currently in use.

While certain representative embodiments and details have been shown merely for the purpose of illustrating the invention, those skilled in the art will readily appreciate that various modifications may be made to the invention without departing from the novel teachings or scope of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the following claims. Although the commonly employed preamble phrase "comprising the steps of" may be used herein, or hereafter, in a method claim, the Applicants *in no way* intend to invoke limitations of 35 USC section 112 ¶6. Furthermore, in any claim that is filed herein or hereafter, any means-plus-function clauses used, or later found to be present, are intended to cover the structures described herein as performing the recited function and not only structural equivalents but *also* equivalent structures.

What is claimed is:

1. An apparatus for automatic preparation of a preselected mixture, comprising:
  - a plurality of vessels, each vessel arranged on a support structure and oriented for dispensing a fluent substance through at least one exit port and a first flow channel, each said first flow channel in further communication with a dedicated measurement assembly and a second flow channel;
  - a receptacle support;
  - a user interface for receiving a first input concerning the mixture; and
  - a storage device holding a plurality of instructions for locating a respective one of said second flow channels and said receptacle support in operative relation for collecting said fluent substance.
2. The apparatus of Claim 1 wherein the mixture is selected from the group consisting of liquid reagents, cleaning solutions, solvents, pesticides, herbicides, paints, mixed beverages, and fluent foodstuff; said instructions for locating further comprises instructions for rotating a respective one of said plurality of vessels to position said respective second flow channel above said receptacle support; and said plurality of instructions further comprises instructions for directing a respective one of said dedicated measurement assemblies to dose, according to said input, said fluent substance so dispensed.
3. The apparatus of Claim 1 wherein: said support structure comprises a framework rotatively coupled to an axis member, said vessels are circuitously arranged on said framework; and the apparatus further comprises a dose actuator stationed in positional relationship with said receptacle support.
4. The apparatus of Claim 3 further comprising a dedicated check valve upstream of each of said measurement assembly and wherein: an upper-end and a lower-end of each said vessel has been hermetically formed from a flexible tubular stock material; said framework comprises a plurality of projections, each said projection to fit through a support opening of said upper-end to hold a respective one of said plurality of vessels; and each said measurement assembly further comprises a piston chamber within which a head connected to a first end of a rod is disposed.
5. The apparatus of Claim 4 wherein said dose actuator comprises a push-surface in connection with a movable linkage, whereby upward movement of said push-surface against a second end of a respective one of said rods causes said head to force any said fluent substance within said piston chamber out and through said respective second flow channel.

6. The apparatus of Claim 3 wherein: said measurement assemblies are circuitously arranged on said framework in proximity to said vessels; each said measurement assembly being movable vertically along said axis member, and further comprising a piston chamber within which a head connected to a first end of a rod is disposed; said respective second flow channel to comprise a tubular-extension; and said operative relation for collecting to comprise said tubular-extension located over said receptacle support.

7. The apparatus of Claim 1 wherein: said support structure comprises a framework movably coupled to a sustaining member, said vessels are arranged on said framework; and the apparatus further comprises a titration module and a mixer, each stationed in positional relationship with said receptacle support.

8. The apparatus of Claim 7 wherein the mixture is selected from the group consisting of liquid reagents, cleaning solutions, solvents, pesticides, herbicides, paints, mixed beverages, and fluent foodstuff; said instructions for locating further comprises instructions for positioning said receptacle support under said respective second flow channel; and said plurality of instructions further comprises instructions for directing a respective one of said dedicated measurement assemblies to dose, according to said input, said fluent substance so dispensed.

9. The apparatus of Claim 1 wherein: said support structure comprises a framework rotatively coupled to a sustaining member, said vessels and measurement assemblies are circuitously arranged on said framework; and the apparatus further comprises a mixer stationed in positional relationship with said receptacle support.

10. The apparatus of Claim 9 further comprising a mixture receptacle on said receptacle support; and wherein said first input comprises information about a preselected number of batches and a chemical make-up of the mixture; said sustaining member is an axis member, each said measurement assembly vertically movable therealong; and said user interface comprises a display.

11. The apparatus of Claim 9 further comprising a titration module stationed in positional relationship with said receptacle support; each of said vessels is flexible-walled with an associated said first flow channel hermetically extending from a respective exit port; and wherein said framework comprises a plurality of outwardly extending spokes upon which said flexible-walled vessels hang.

12. The apparatus of Claim 9 further comprising a portable base to which said sustaining member is affixed, and a shroud covering said measurement assemblies and a does actuator stationed in positional relationship with said receptacle support upon said base.

13. A method of preparing a preselected mixture using a computerized apparatus, comprising the steps of:

receiving a first input concerning the mixture; and

according to said first input and a plurality of instructions held on a storage device of the apparatus: automatically locating a second flow channel and a receptacle support in operative relation; dispensing a fluent substance through at least one exit port and a first flow channel from a respective one of a plurality of vessels arranged on a support structure of the apparatus, each said first flow channel in further communication with a dedicated measurement assembly and a second flow channel; and using said measurement assembly, dosing said fluent substance so dispensed.

14. The method of Claim 13 further comprising the step of positioning a mixture receptacle on said receptacle support; and wherein said step of automatically locating said second flow channel further comprises rotating said respective vessel and a respective one of said dedicated measurement assemblies such that said second flow channel is over said mixture receptacle.

15. The method of Claim 14 further comprising the steps of:

preselecting said mixture from the group consisting of liquid reagents, cleaning solutions, solvents, pesticides, herbicides, paints, mixed beverages, and fluent foodstuff, and manually entering said first input, comprising said preselection, through a user interface of the apparatus;

collecting said dosed fluent substance in said mixture receptacle;

mixing said collected fluent substance; and

further according to said first input, automatically titrating said collected fluent substance to balance pH thereof.


16. The method of Claim 13 wherein:

said step of automatically locating said second flow channel further comprises moving said receptacle support under said second flow channel; and

said step of dosing further comprises the steps of allowing said dispensed fluent substance to pass through a check valve in communication with said first flow channel and into a volume of a piston chamber of a respective one of said dedicated measurement assemblies, and actuating a dose actuator stationed in positional relationship with said receptacle support.


17. The method of Claim 16 wherein:  
said step of automatically locating said second flow channel further comprises also moving, vertically along a sustaining member of said support structure, said respective dedicated measurement assembly; and  
said step of actuating further comprises moving, in an upwardly direction, a push-surface of said dose actuator against a second end of a rod connected to a head disposed within said piston chamber.
18. The method of Claim 13 further comprising the steps of: positioning a mixture receptacle on said receptacle support; collecting said dosed fluent substance in said mixture receptacle; and further according to said first input, automatically moving a framework of said support structure so that said second flow channel associated with said respective vessel is no longer in said operative relation with said receptacle support, and locating a second flow channel in communication with a second one of said plurality of vessels over said receptacle support.
19. The method of Claim 18 further comprising the steps of:  
dispensing a second fluent substance through at least one second vessel port and a first flow channel from said second vessel;  
using a second one of said dedicated measurement assemblies in communication with said first flow channel from said second vessel, dosing said second fluent substance so dispensed; and  
collecting said dosed second fluent substance in said mixture receptacle.
20. The method of Claim 19 further comprising the steps of:  
mixing said collected fluent substances within said mixture receptacle; and  
further according to said first input, automatically titrating said collected fluent substances to balance pH thereof, comprising inserting a pH probe into said collected fluent substances and adding pH solution as directed.
21. An apparatus for automatic preparation of a preselected mixture, comprising:  
a plurality of vessels, each vessel arranged on a support structure and oriented for dispensing a fluent substance through a first flow channel that is in further communication with a dedicated measurement assembly for dosing said substance so dispensed;  
a user interface for receiving a first input concerning the mixture; and  
a storage device holding a plurality of instructions for said dosing, according to said input.

1/11

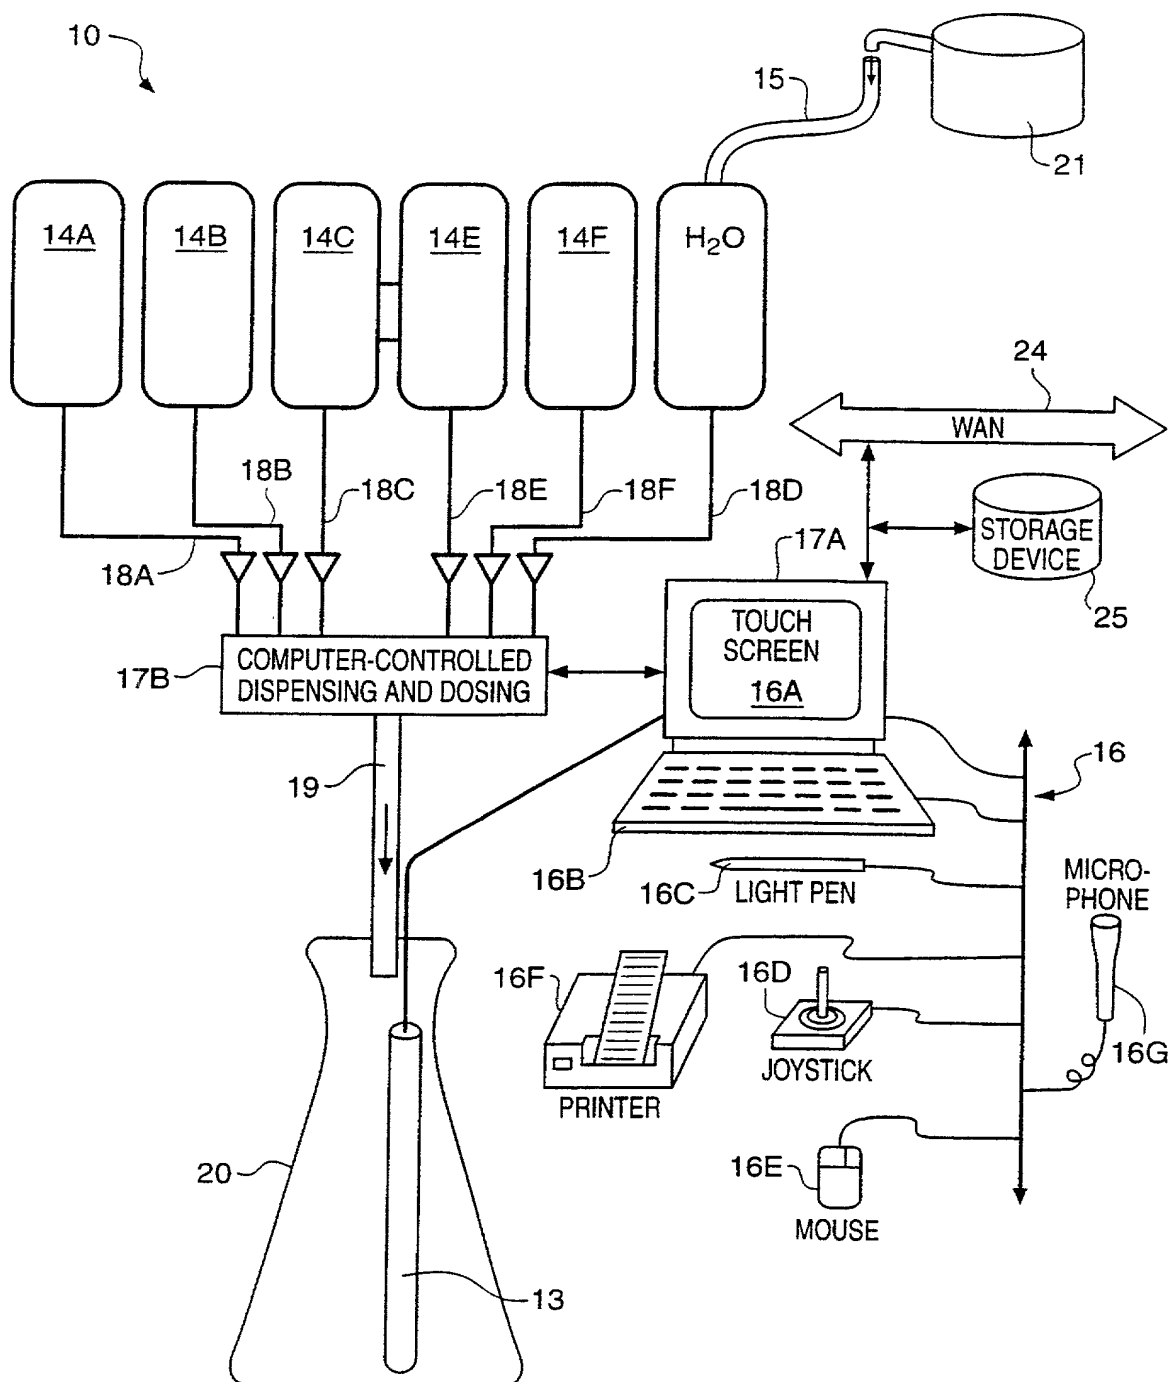**FIG. 1**




2/11

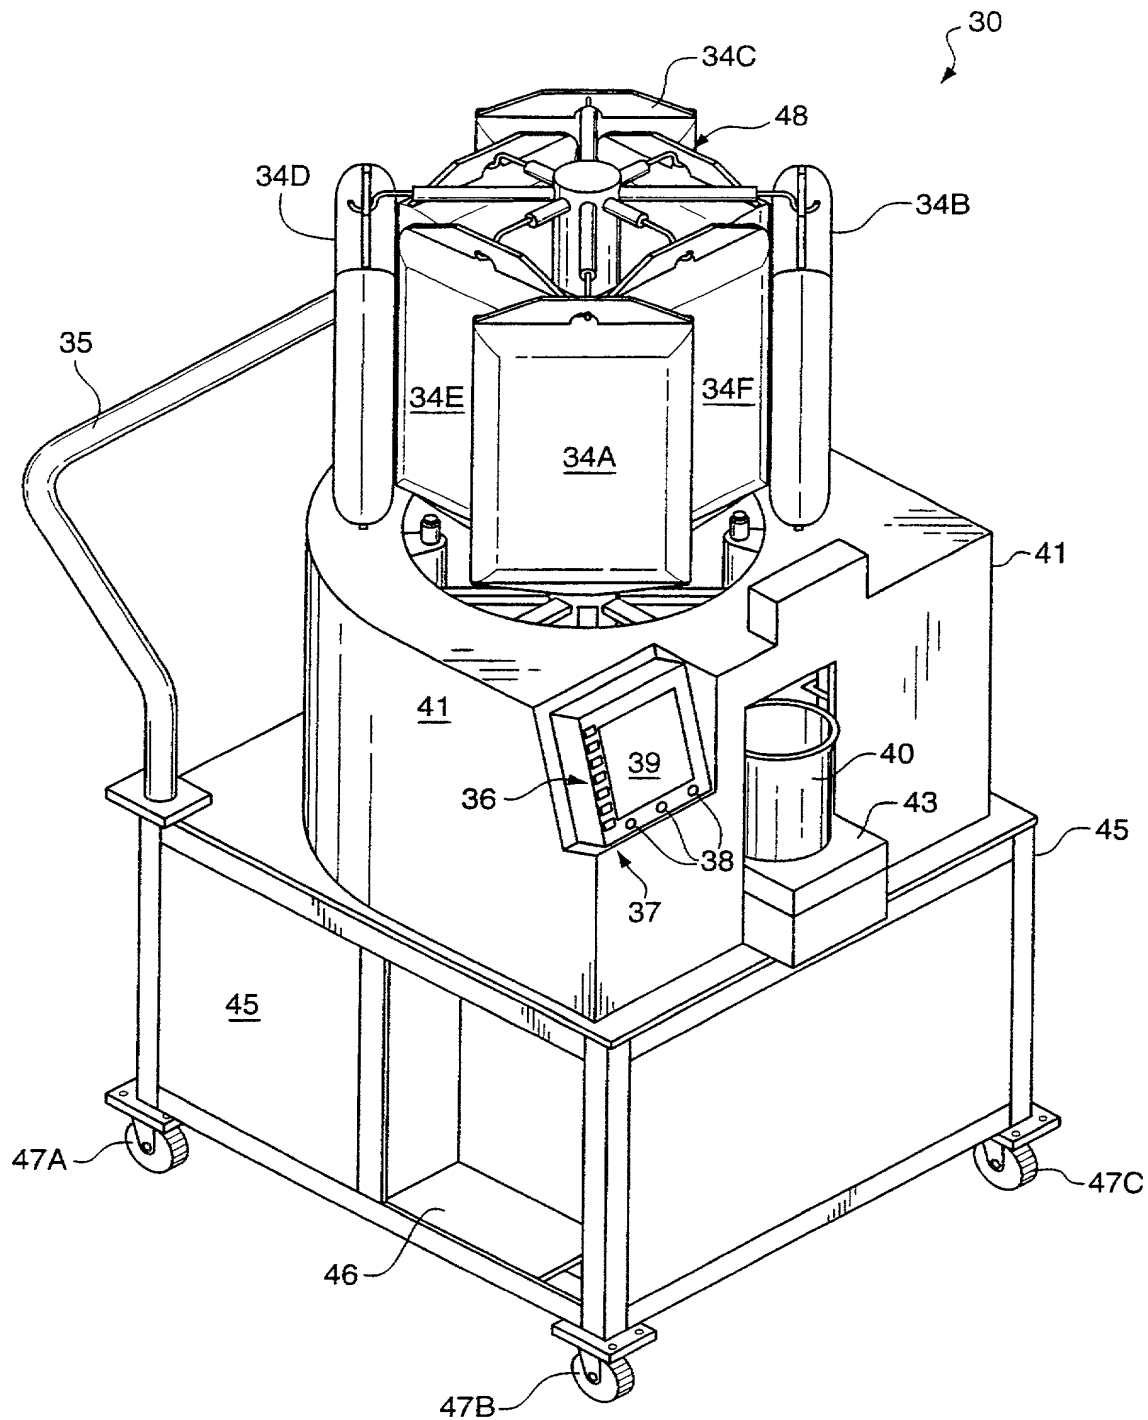


**FIG. 2**

3/11

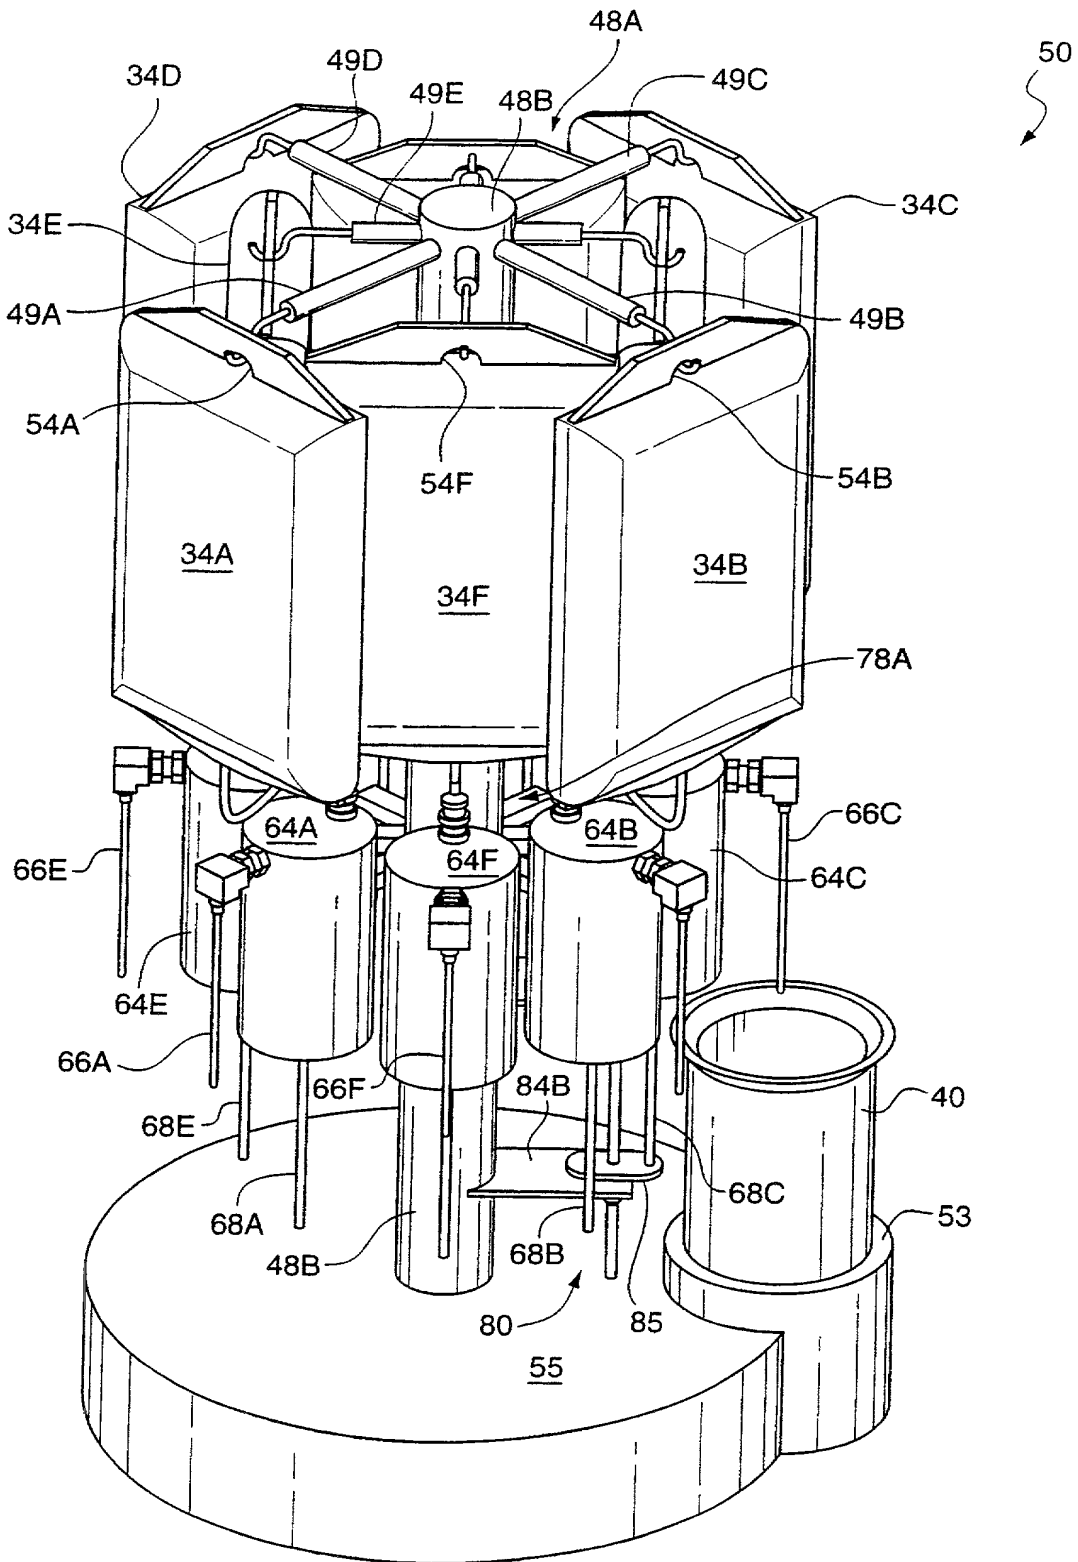

**FIG. 3**


SUBSTITUTE SHEET (RULE 26)

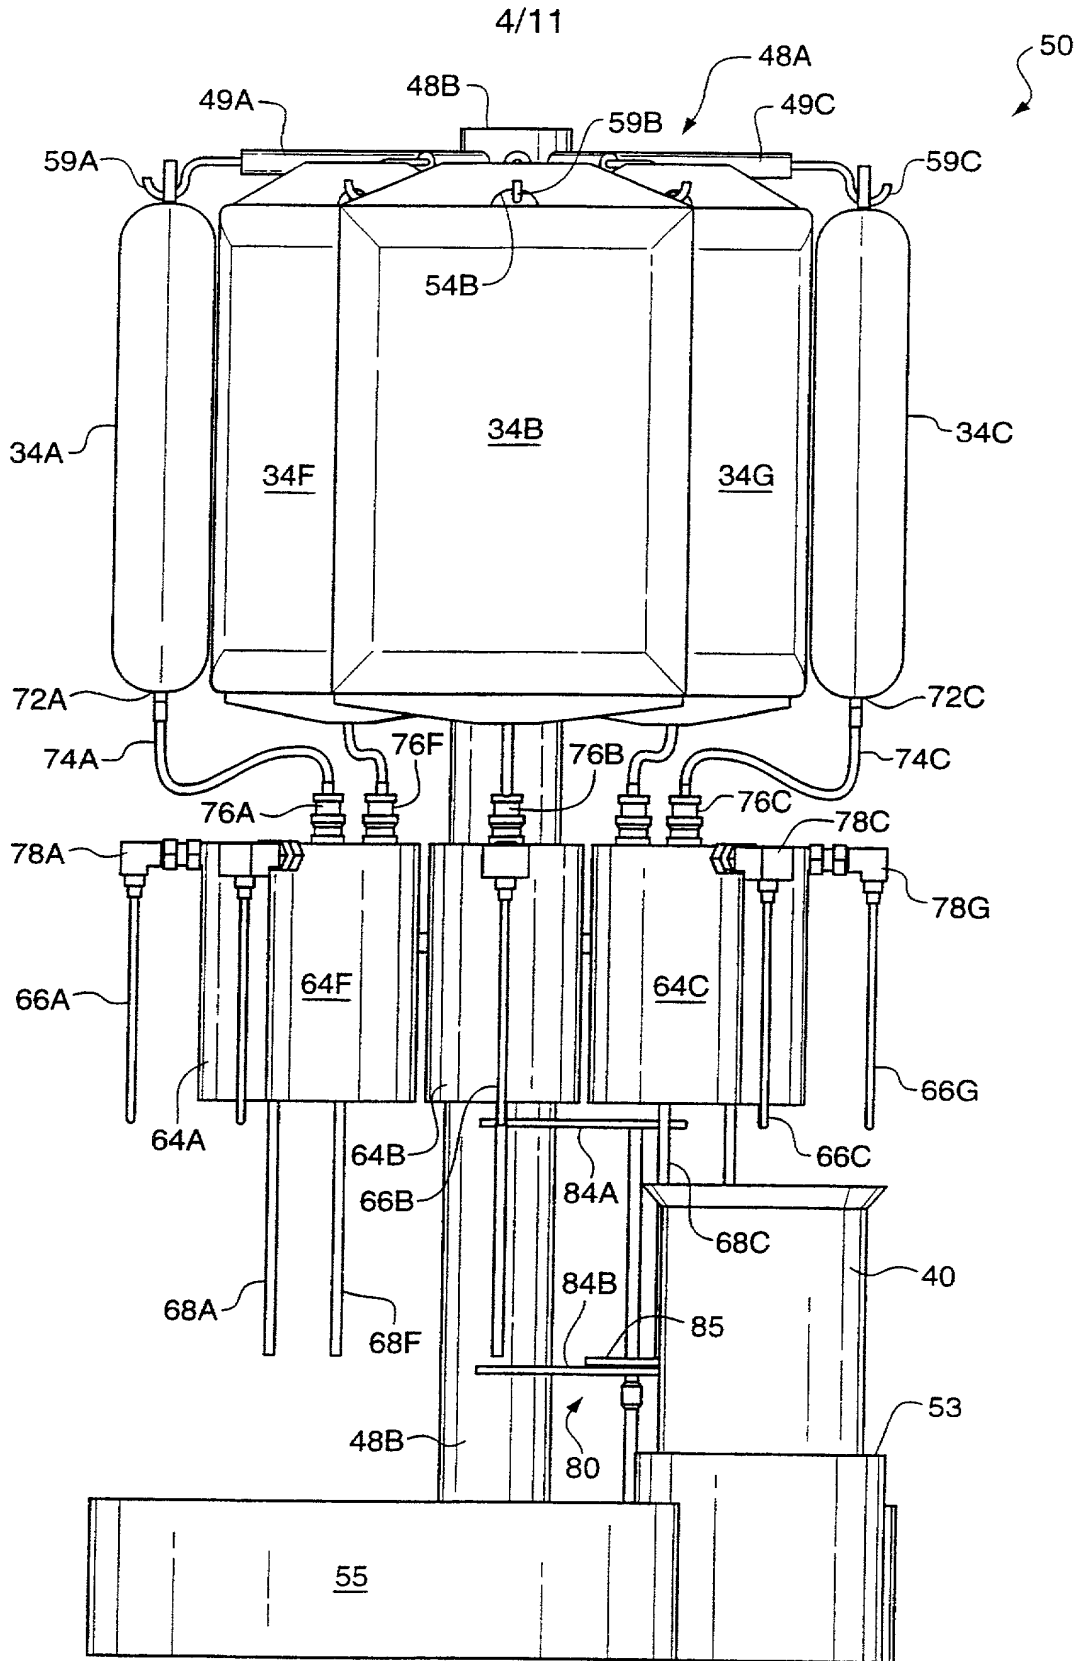

**FIG. 4**


SUBSTITUTE SHEET (RULE 26)

5/11

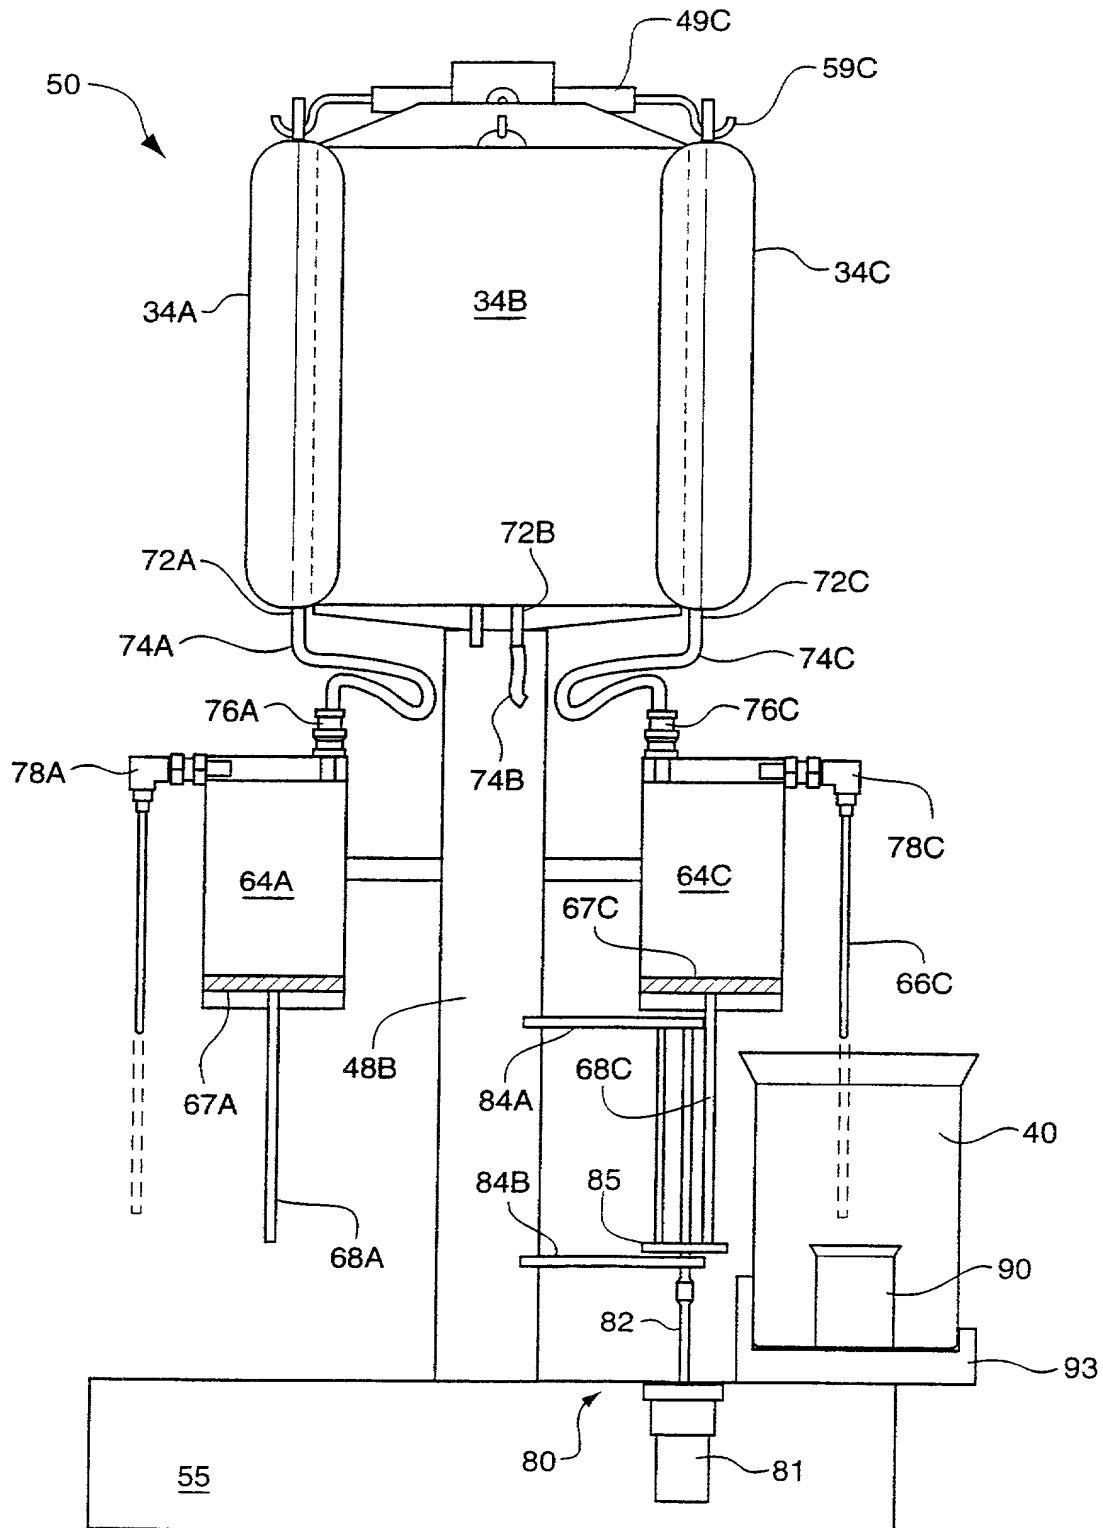**FIG. 5A**


SUBSTITUTE SHEET (RULE 26)

6/11

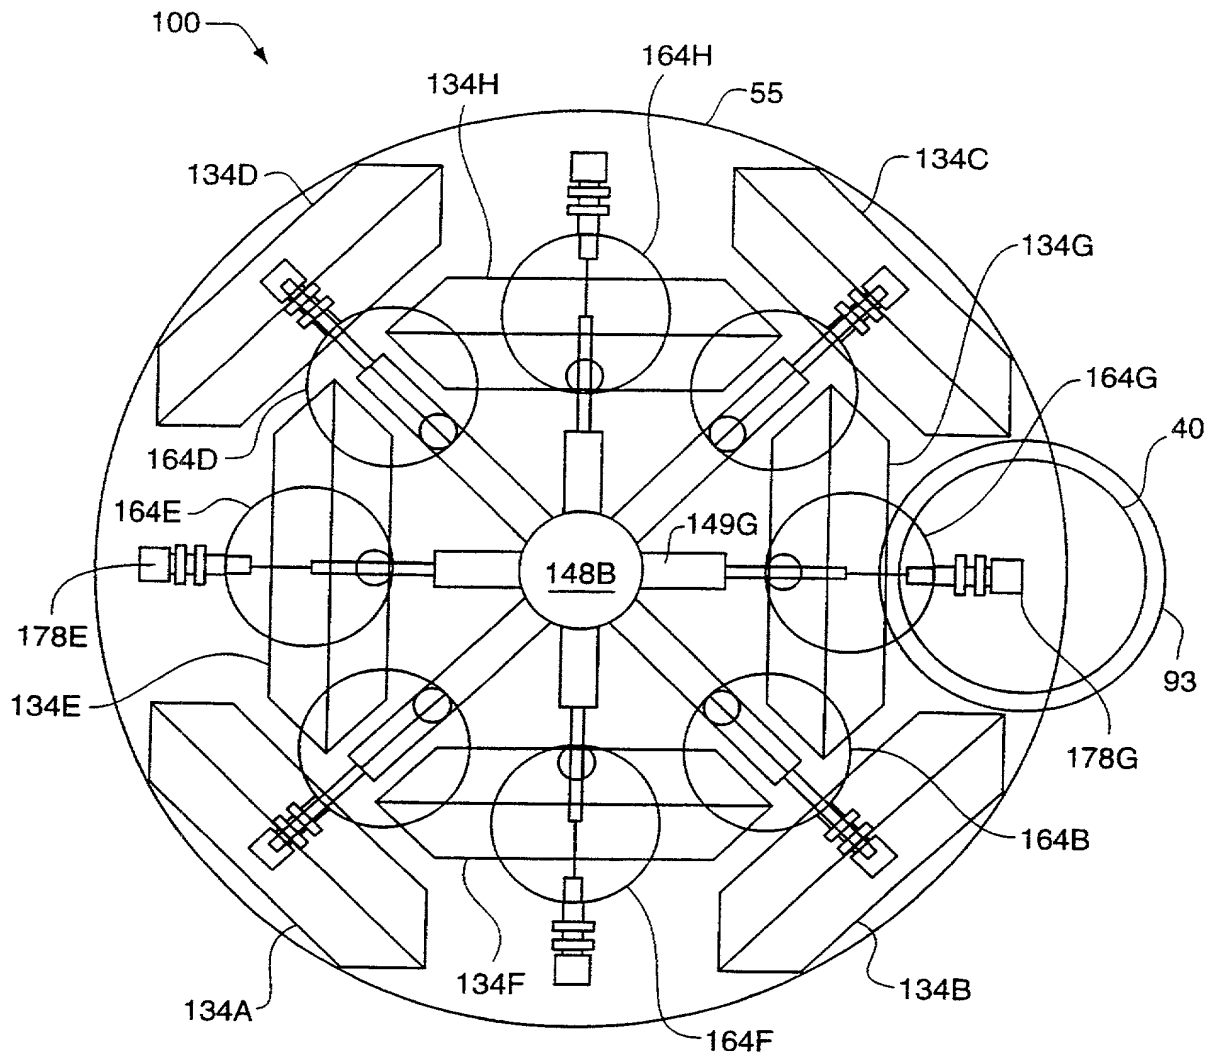


**FIG. 5B**

7/11

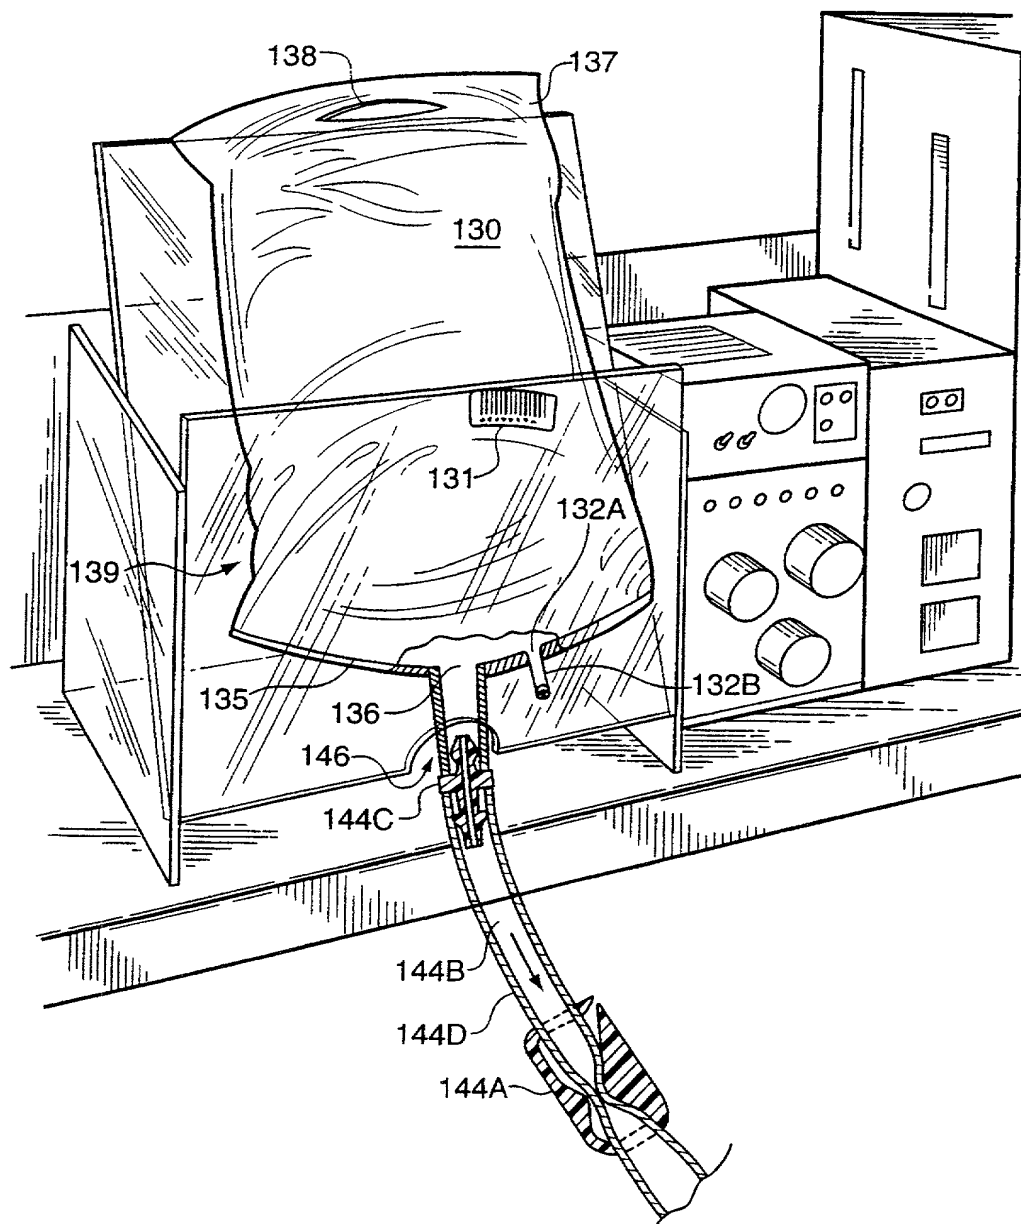


**FIG. 6**

8/11

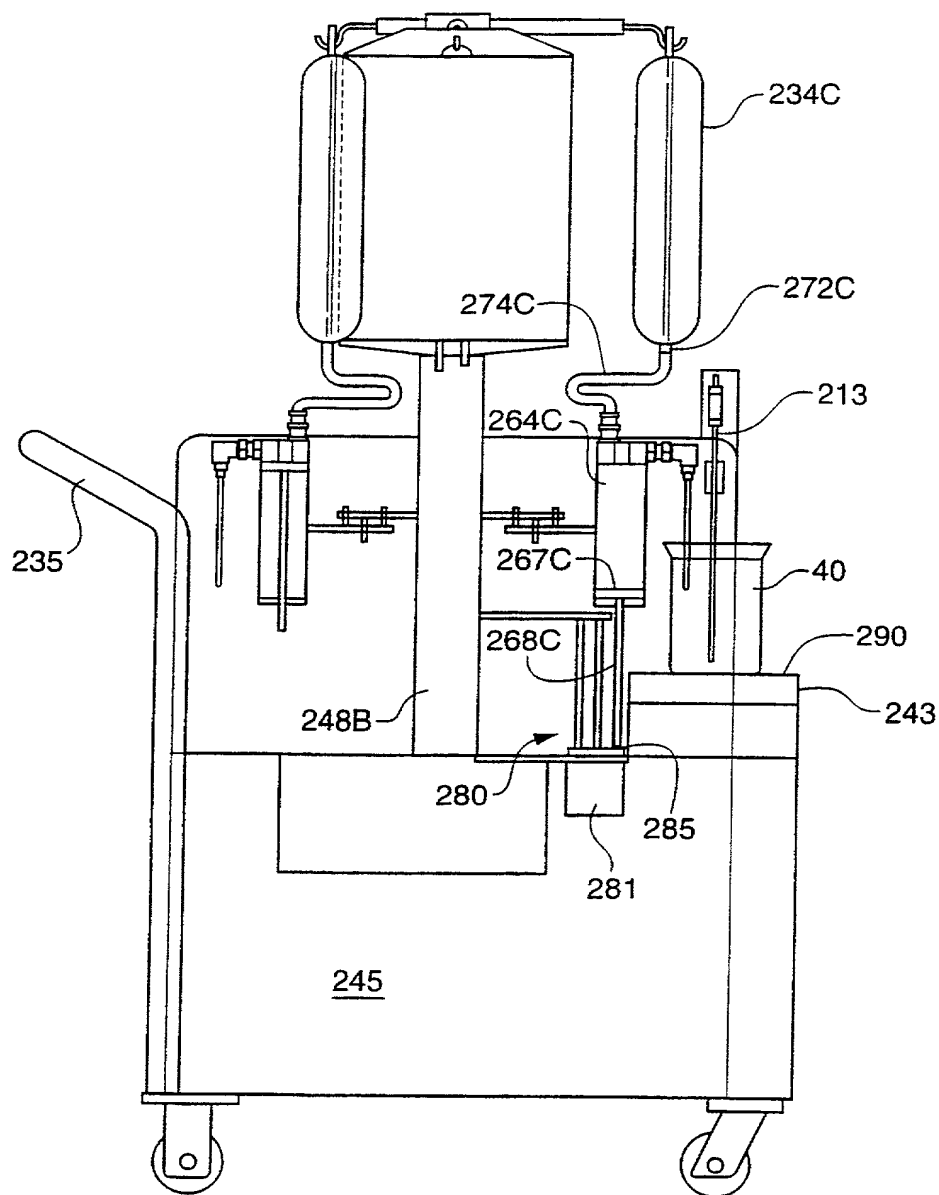


**FIG. 7A**

9/11

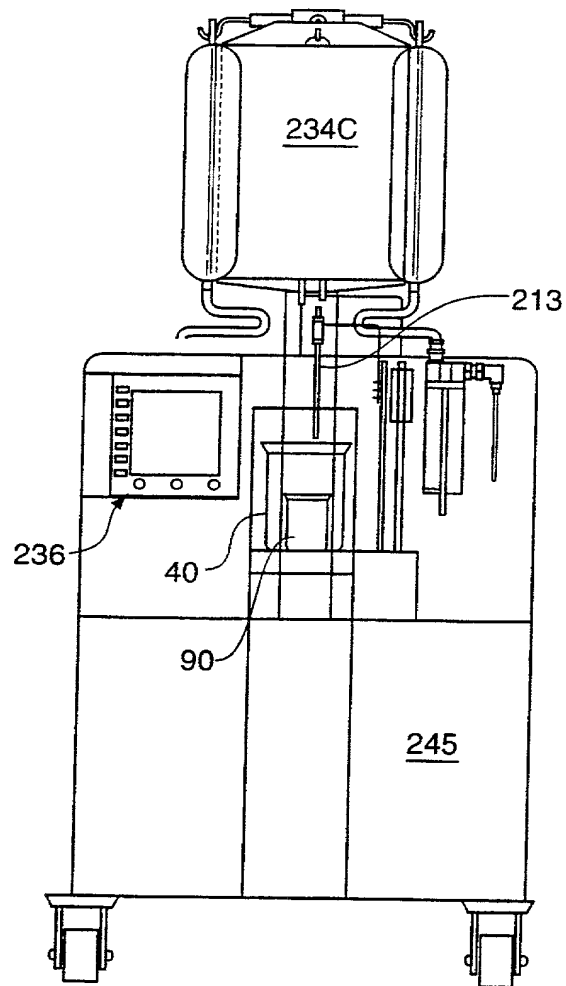


**FIG. 7B**

**FIG. 7C**

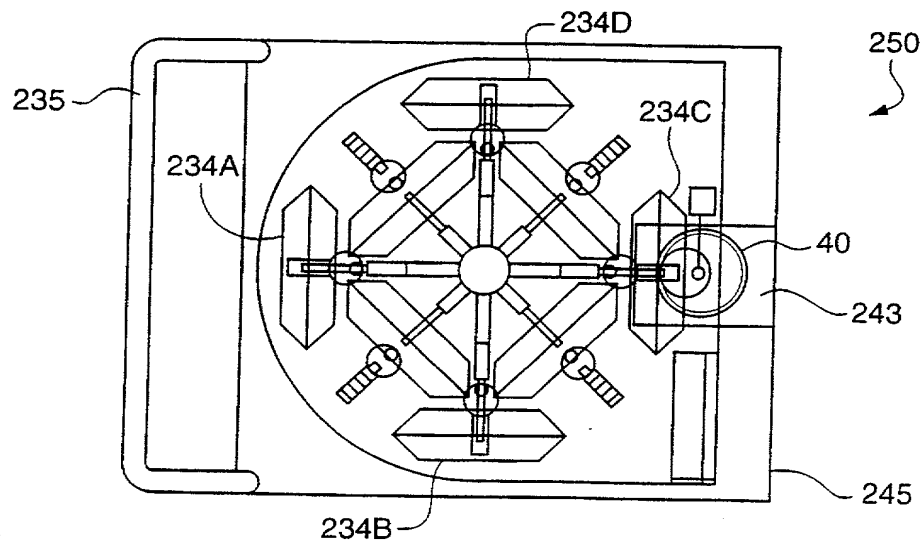




10/11

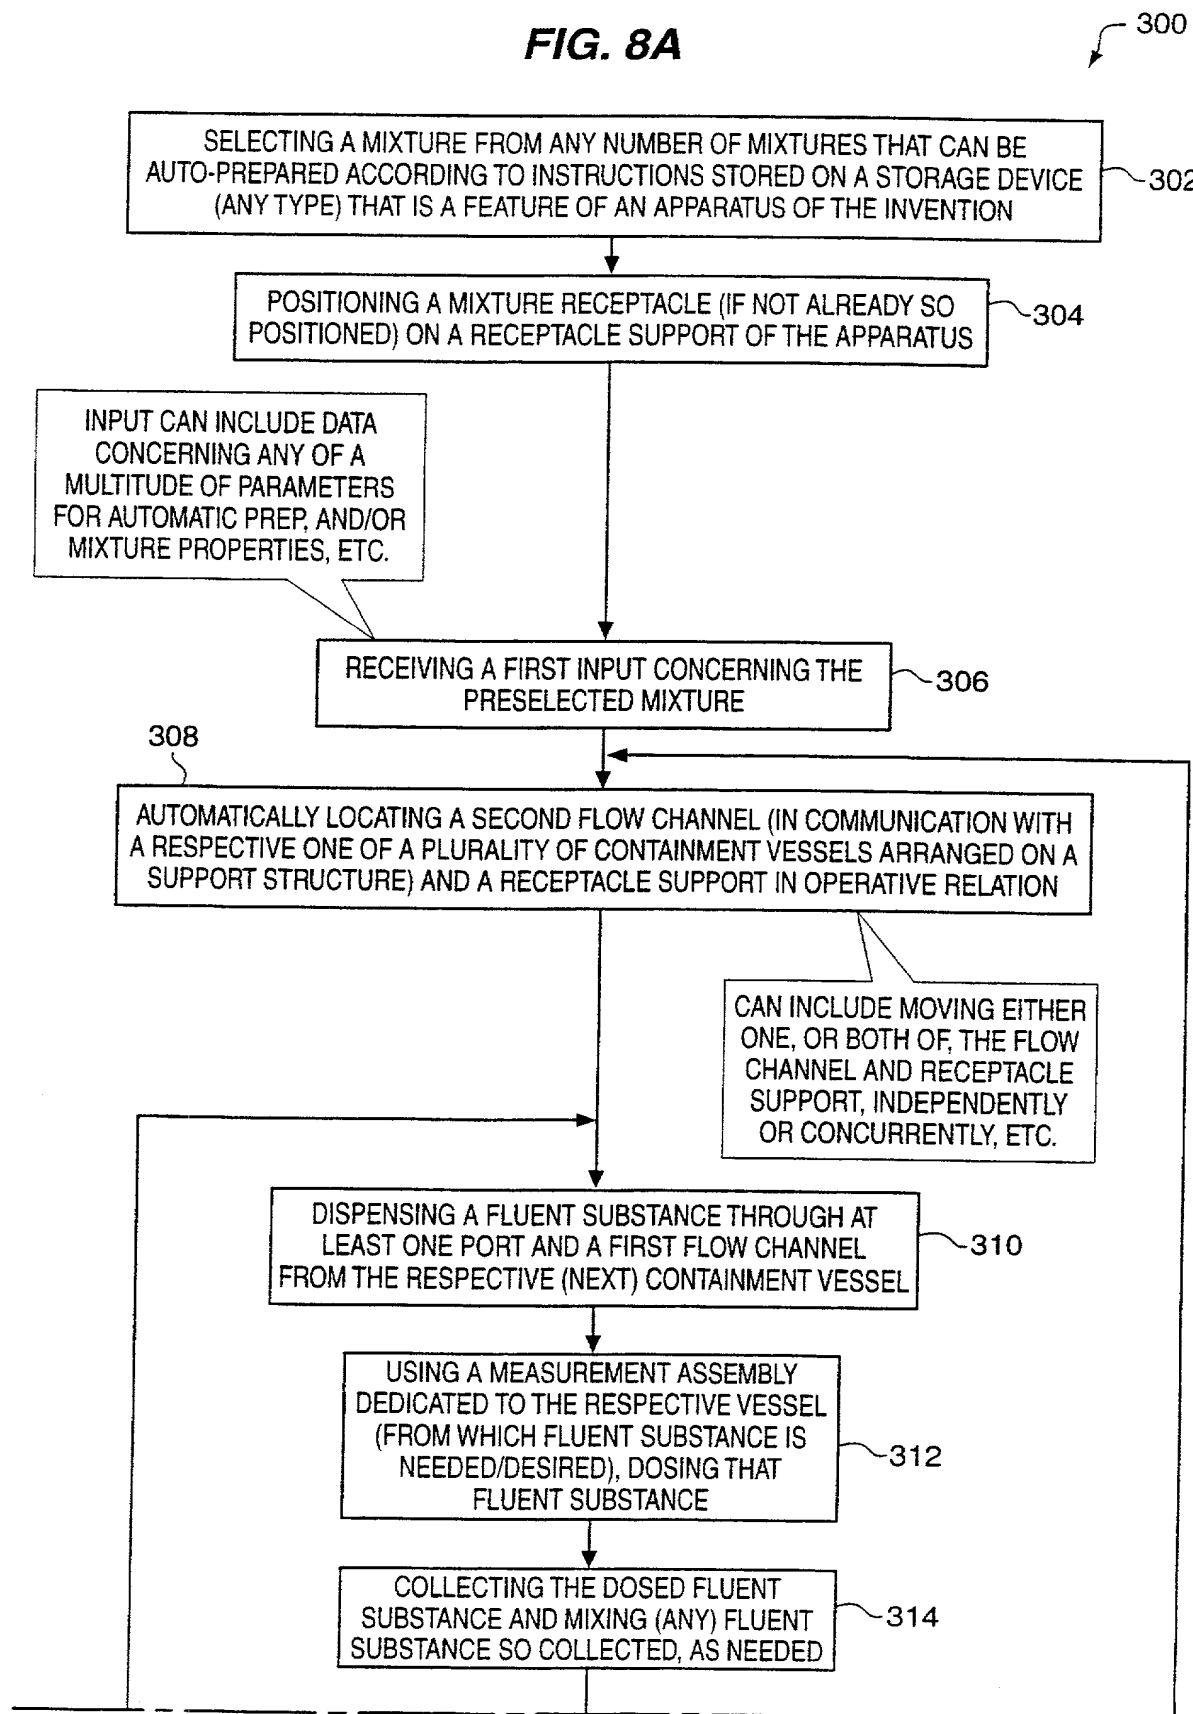**FIG. 8A**

11/11

FIG. 8B

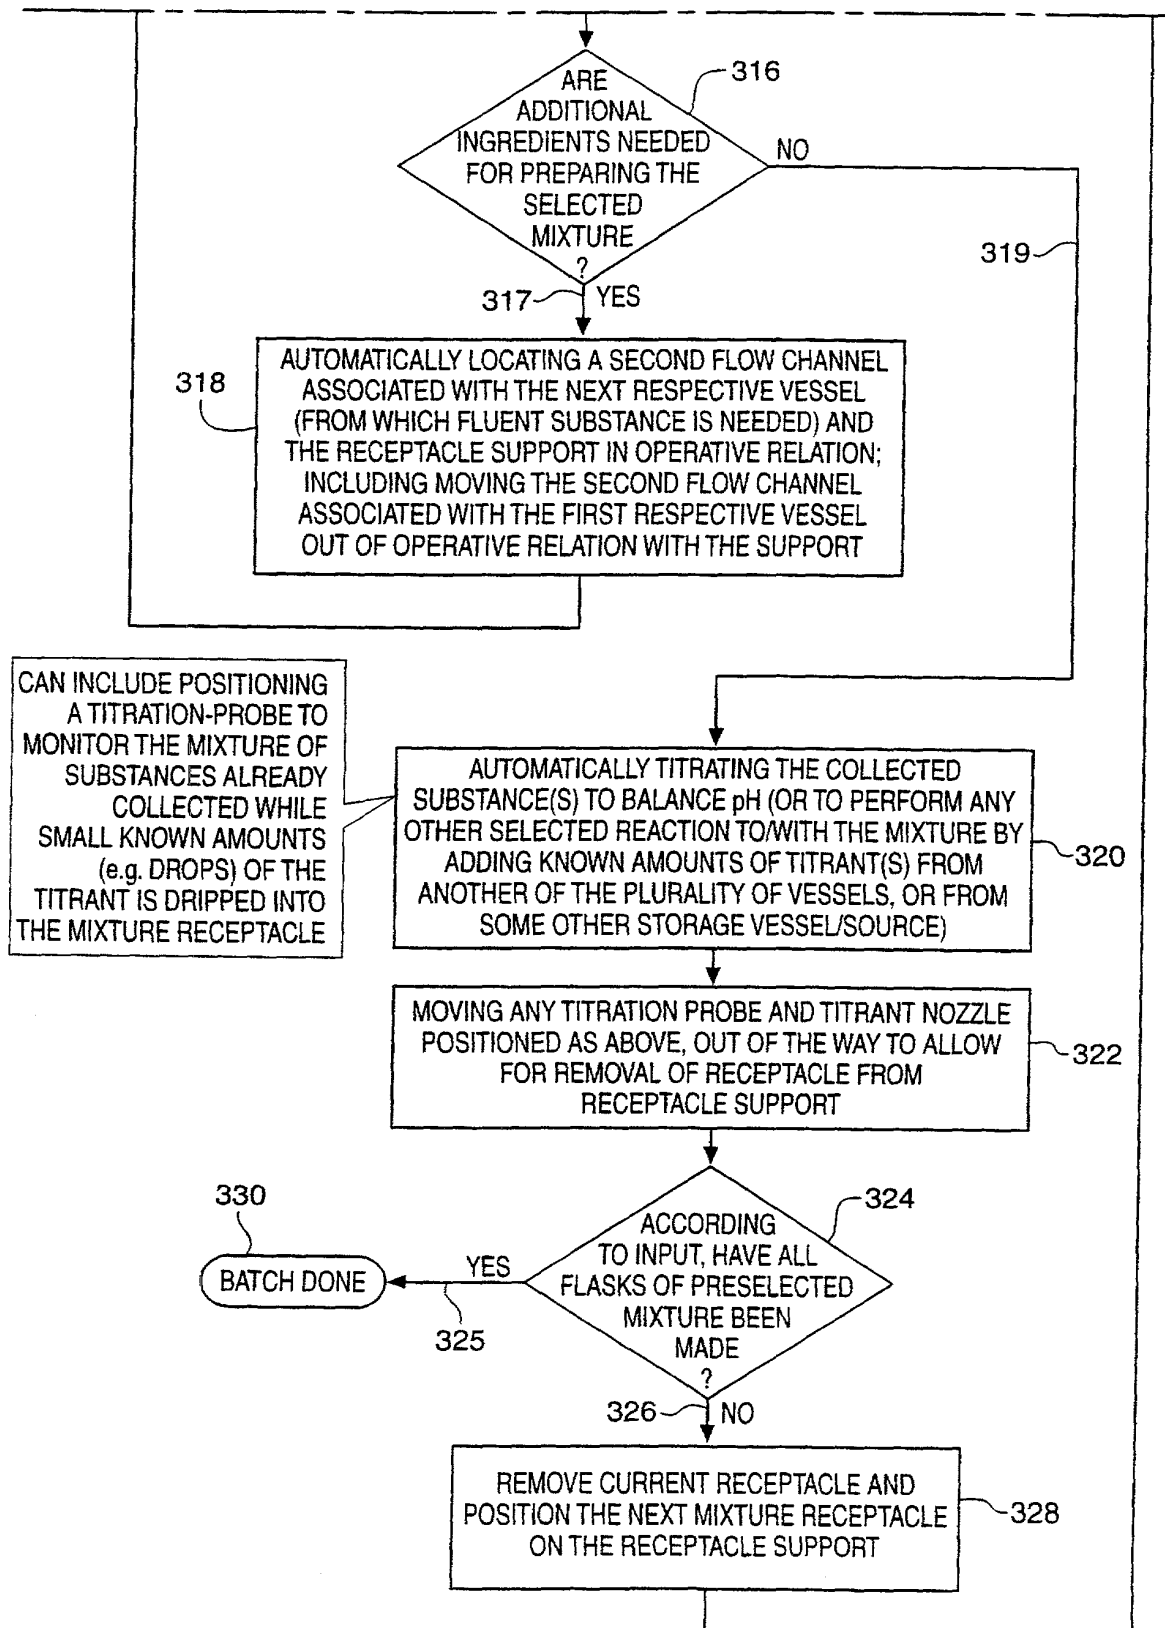

## DECLARATION FOR PATENT APPLICATION AND APPOINTMENT OF ATTORNEY

As a below-named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention (Design, if applicable) entitled: **Apparatus for Automatic Preparation of a Mixture and Method**

the specification of which (check one):

- ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_, as Application Serial No. \_\_\_\_\_, and was amended on \_\_\_\_\_ (if applicable).  
☐ was filed on \_\_\_\_\_, as International Application (PCT) No. \_\_\_\_\_, and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with *Title 37, Code of Federal Regulations, § 1.56(a)*. I hereby claim foreign priority benefits under *Title 35, United States Code § 119* of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which the priority is claimed.

## PRIOR FOREIGN APPLICATION(S) AND PCT APPLICATION(S) FILED WITH THE USPTO AS ROUTING OFFICE

NUMBER	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED
PCT/US00/12229	UNITED STATES	MAY 6, 2000	<input checked="" type="checkbox"/> Yes

I hereby claim the benefit under *Title 35, United States Code, § 120* of any United States application(s) or PCT international application(s) designating The United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of *Title 35, United States Code, § 112*, I acknowledge the duty to disclose material information as defined in *Title 37, Code of Federal Regulations, § 1.56(a)* which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

APPLICATION NUMBER	FILING DATE	STATUS (indicate Patented, Pending or Abandoned)
60/133,251	May 8, 1999	Pending (Provisional Application)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine, or imprisonment, or both, under *Section 1001 of Title 18 of the United States Code*, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** We hereby appoint as our attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Jean Macheledt, Registration Number 33,956 and Jennifer Bales, Registration Number 38,070.

Direct all correspondence to:

Customer Number: 28304



Jean M. Macheledt  
501 Skysail Lane  
Fort Collins, CO 80525-3133  
Tel. 970.218.6798

Direct all telephone calls to:

Jean Macheledt  
970.218.6798

X See following pages for additional joint inventors.

Full Name of First or Sole Inventor Edwin D. Neas		Citizenship USA	
Residence Address - Street 8202 West County Road 102		Post Office Address Street 8202 West County Road 102	
City Nunn		City Nunn	
State or Country Colorado	Zip 80648	State or Country Colorado	Zip 80648
DATE 11-6-01		SIGNATURE <i>Edwin D. Neas</i>	

## DECLARATION FOR PATENT APPLICATION AND APPOINTMENT OF ATTORNEY

Page 2

<i>Full Name of Additional Joint Inventor</i> Dennis L. Templar	<i>Citizenship</i> USA
<i>Residence Address - Street</i> 7421 Vardon Way	<i>Post Office Address Street</i> 7421 Vardon Way
<i>City</i> Fort Collins	<i>City</i> Fort Collins
<i>State or Country</i> CO <i>Zip</i> Colorado 80528	<i>State or Country</i> <i>Zip</i> Colorado 80528
<i>DATE</i> 11-6-01	<i>SIGNATURE</i> Dennis L. Templar

<i>Full Name of Additional Joint Inventor</i> Harry J. Tiffany III	<i>Citizenship</i> USA
<i>Residence Address - Street</i> 14247 Country Road X	<i>Post Office Address Street</i> 14247 Country Road X
<i>City</i> Weldona	<i>City</i> Weldona
<i>State or Country</i> CO <i>Zip</i> Colorado 80653	<i>State or Country</i> <i>Zip</i> Colorado 80653
<i>DATE</i> 11-6-01	<i>SIGNATURE</i> Harry J. Tiffany